

PCC750B

Prime Power: 545KW/681KVA

Standby Power: 600KW/750KVA

Voltage: 400V

Powered by Cummins QSK19-G32 Engine

Genset Performance

- c, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\% \leq -15\%$
- The transient voltage deviation $\leq +20\% \leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S$ (Voltage $\pm 3\%$)
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
- Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.

Standard Configuration


- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature (50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Optional Items

- Starting batteries
- Fuel tank
- Lubricate-water separator
- Sensor for low coolant level, low fuel/oil level
- City power monitoring & controlling system
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer Type
- Environmentally design and construction of Genset room engineering for the Genset room

Diesel Engine

- Model: **QSK19-G32**
- Structure: Replaceable wet cylinder liner, good heat dissipation effect, easy to replace; all model parts have strong versatility, high degree of serialization, and easy maintenance; both the cylinder block and cylinder head adopt built-in pressure lubrication oil passages, with compact structure and easy to troubleshoot Low rate.
- Intake and exhaust: The efficient Holset exhaust gas supercharger further improves combustion; the pressure-type pulse exhaust pipe can make full use of exhaust gas energy and improve engine efficiency; intercooling technology ensures better fuel economy and emissions.
- Cooling system: forced water cooling by gear centrifugal water pump, large flow water channel design, good cooling effect; spin-on water filter and special DCA additive can effectively prevent rust and cavitation, control coolant acidity and remove impurities.
- Fuel system: Using the world's leading high-pressure common rail fuel system and fully electronic control module, ultra-high fuel injection pressure.
- Lubricating oil system: pre-lubrication system, Centriguard centrifugal filter and CENTINEL continuous oil renewal system, two-stage combined Fleetguard oil filter, which can obtain a longer maintenance cycle and reduce the engine startup failure rate.
- Emissions compliance:
The improved combustion chamber shape allows the engine to achieve excellent emission levels without the need for post-processing, and has passed China's non-road stage three emission certification.

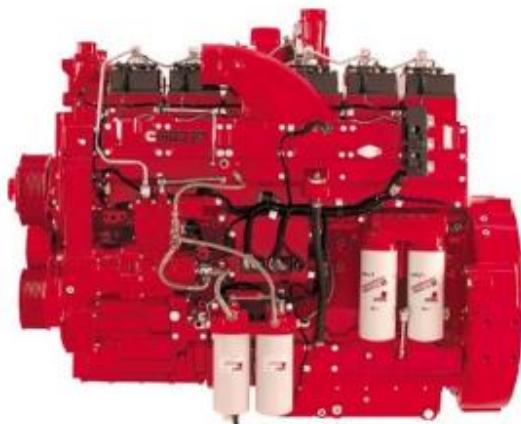

Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard

- 3 phases voltage: U_a, U_b, U_c
- Frequency F1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature °C display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature °C display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection

Genset Protection

- Program alarm and status input
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital display




Communication Interface

(Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

Genset	
Model	PCC700B
Prime Rating (kw)	545
Standby Rating (kw)	600
Rate current(A)	983
Power factor	0.8
Frequency(Hz)	50
Engine	
Engine Model	QSK19-G32
Gross Engine output-Prime (kw)	606
Gross Engine output-Standby (kw)	671
Bore * stroke (mm)	159*159
Cylinders and structure	6 In line
Displacement(Liter)	18.9
Compression Ratio	14.2:1
Intake way	Turbocharged and Charge Air Cooled
Max intake resistance (KPa)	6.2
Air intake (m ³ /h)	2794
Max exhaust back pressure (KPa)	6.8
Exhaust gas flow (m ³ /h)	7049
Exhaust temp (°C)	497
Cooling way	Water Radiator & Fan
Fan exhaust flow (m ³ /min)	1055
Coolant capacity (L)	130
Highest water temperature(°C)	104
Minimum air opening to room (m ²)	4.1/3.4
Thermostat range (°C)	83-95
Max oil temperature (°C)	121
Lubrication system oil capacity (L)	83
Rate load fuel consumption(L/H)	143.4
Standard Governor/Class	Programmed Fuel Injection
Emission	China Tier 3
Alternator	
Rated Voltage(V)	230/400
Output Way	3 Phases, 4 wires
Rated power factor	0.8
Exciter	Brushless, Self-excitator
Max voltage regulation	±1%
Protection class	IP21-23
Insulation class	H
Controller	
Brand	POWERTEC

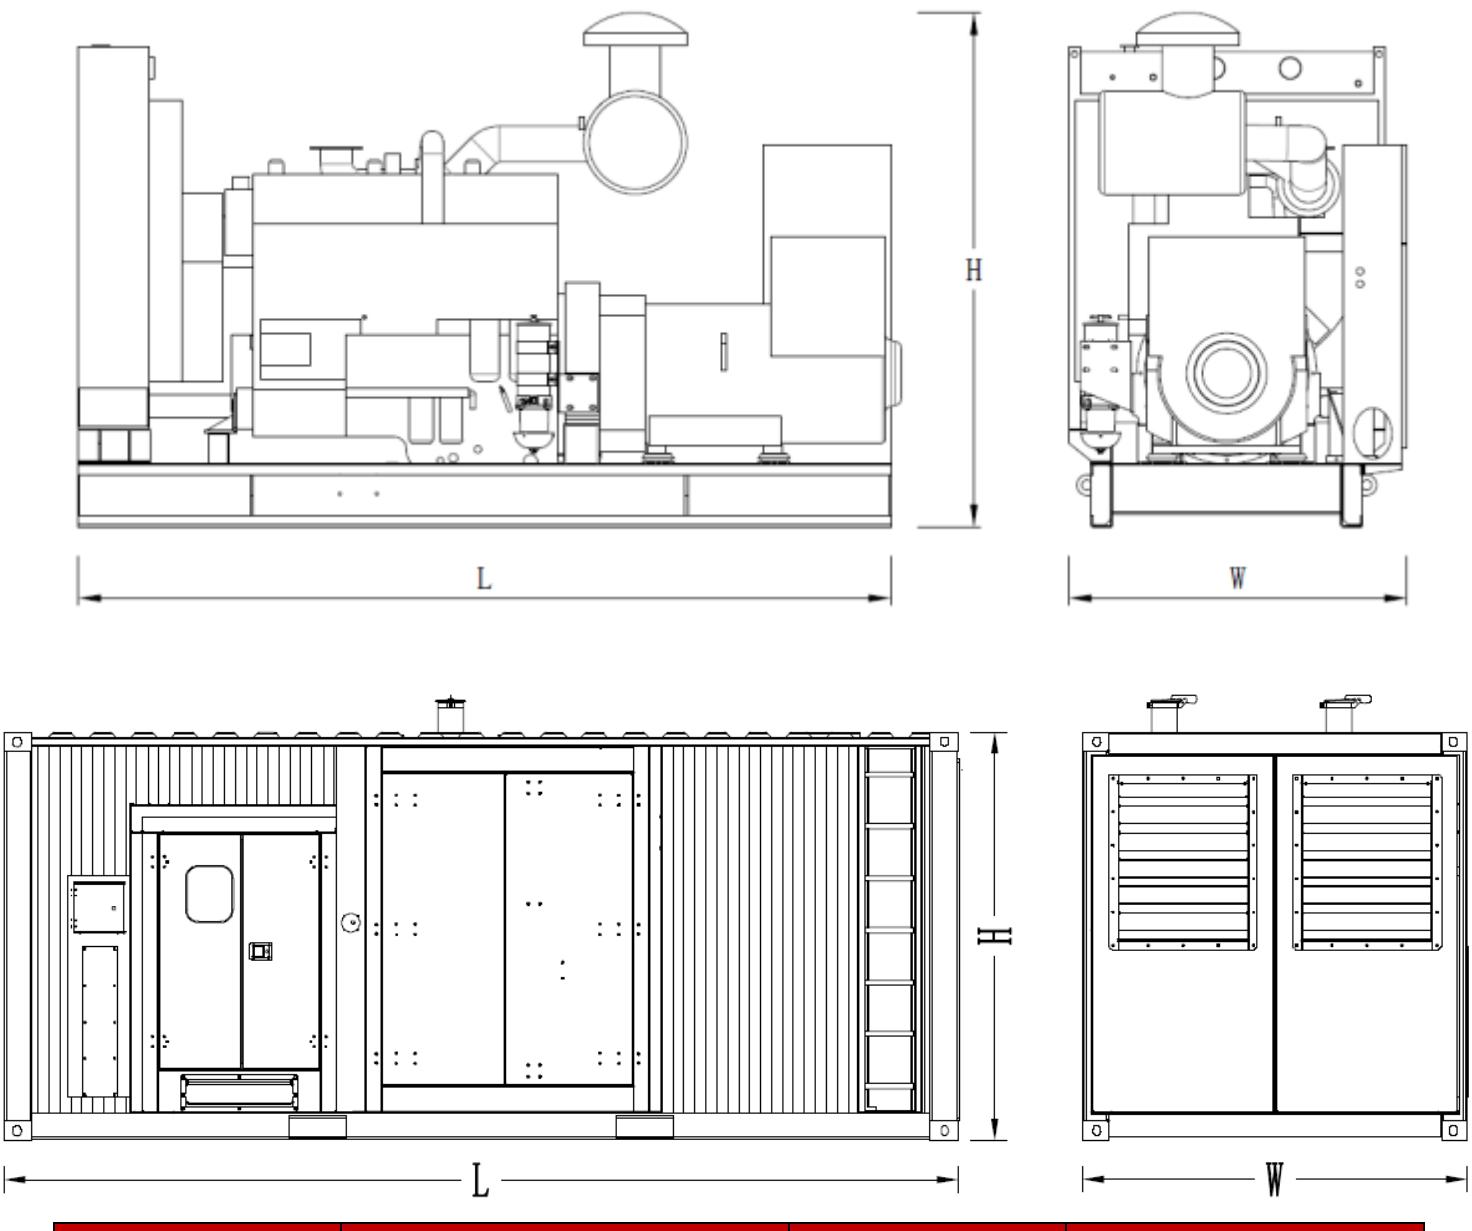

Type	Dimension (mm) (L*W*H)	Weight (kg)	Fuel Tank Capacity (L)
Open Type	3975*1893*2379	4800	–
Silent Type	6058*2438*2896	9000	1500

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn