

PDC350A

Prime Power: 256KW/320KVA

Standby Power: 280KW/350KVA

Voltage: 400V

Powered by Cummins 6LTAA9.5-G1 Engine

Genset Performance

- 400V, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop $\leq 3\%$
- Voltage regulation $\leq 0.3\%$
- The steady state frequency $\leq 0.5\%$
- The steady state voltage deviation $\leq \pm 1\%$
- The transient frequency deviation $\leq +10\% \leq -15\%$
- The transient voltage deviation $\leq +20\% \leq -15\%$
- Frequency recovery time $\leq 3S$
- Voltage recovery time $\leq 1S$ (Voltage $\pm 3\%$)
- THF (Telephone Harmonic Factor) < 3
- TIF (Telephone Influence Factor) < 50
- Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.

Standard Configuration

- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature (50°C Optional)
- Circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer
- Design and construction of environmental protection engineering for the Genset room



Diesel Engine

- Model: **6LTAA9.5-G1**
- Description: Cummins 6LTAA9.5G engine is a mechanical fuel system that provides heavy-duty performance. Electronic controller controls to keep engine speed more stable. 24-valve and larger flow injector design, one of the highest power-to-weight ratio products in its class;
- 4-valve structure: 4 valves per cylinder, improving power through faster response and fuel economy, and high work efficiency;
- Fuel System: Bosch Type P7100 mechanical fuel injection pump features high injection pressure, optimizing engine performance and establishing an unparalleled reputation for reliability;
- Electronic governor control unit: Strengthening the electronic governor control unit can optimize engine speed stability and reliability;
- Electronic fuel shut-off valve: Increases engine safety in mechanical fuel systems;
- Turbocharger: Holset HE400 and HE500 non-wastegate turbochargers are used to improve power and fuel economy and reduce smoke and noise levels;
- Coolpac integrated design: The product comes with a cooling pack and air filter kit, providing a complete power package. Every component is developed specifically for rigorously tested G-Drive products, ensuring efficient performance, durability and reliability.



Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complies for BS5625, class 2.
- Sealed with advanced lubricating grease to prolong life of bearing.



Standard

- 3 phases voltage: U_a, U_b, U_c
- Frequency F1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature °C display
- Oil pressure OP
- Engine speed
- 3 phases current: I_a, I_b, I_c
- Active power PA
- Power factor PF
- Temperature °C display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



Standard Protection

Genset Protection

- Programmable I/O signal
- Emergency stop

Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital display




Communication Interface

(Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;.

| Genset | |
|-------------------------------------|------------------------------------|
| Model | PDC350A |
| Prime Rating (kw) | 256 |
| Standby Rating (kw) | 280 |
| Rate voltage(V) | 400 |
| Rate current(A) | 462 |
| Power factor | 0.8 |
| Frequency(Hz) | 50 |
| Engine | |
| Engine Model | 6LTAA9.5-G1 |
| Gross Engine output-Prime (kw) | 290 |
| Gross Engine output-Standby (kw) | 320 |
| Bore * stroke (mm) | 116*148 |
| Cylinders and structure | 6 In line |
| Displacement(Liter) | 9.5 |
| Compression Ratio | 16.6:1 |
| Intake way | Turbocharged and Charge Air Cooled |
| Max intake resistance (KPa) | 6.2 |
| Air intake (m3/h) | 984 |
| Max exhaust back pressure (KPa) | 10 |
| Exhaust gas flow (m3/h) | 2102 |
| Exhaust temp (°C) | 482 |
| Cooling way | Water Radiator & Fan |
| Fan exhaust flow (m3/min) | 480 |
| Coolant capacity (L) | 40 |
| Highest water temperature(°C) | 104 |
| Minimum air opening to room (m2) | 2.4/2.0 |
| Thermostat range (°C) | 82-95 |
| Max oil temperature (°C) | 121 |
| Lubrication system oil capacity (L) | 32.4 |
| Rate load fuel consumption(L/H) | 70 |
| Standard Governor | Electronic |
| Alternator | |
| Rated Voltage(V) | 230/400 |
| Output Way | 3 Phases, 4 wires |
| Rated power factor | 0.8 |
| Exciter | Brushless, Self-excitator |
| Max voltage regulation | ±1% |
| Phase | 3 |
| Protection | IP21-23 |
| Insulation | H |
| Controller | |
| Brand | POWERTEC |

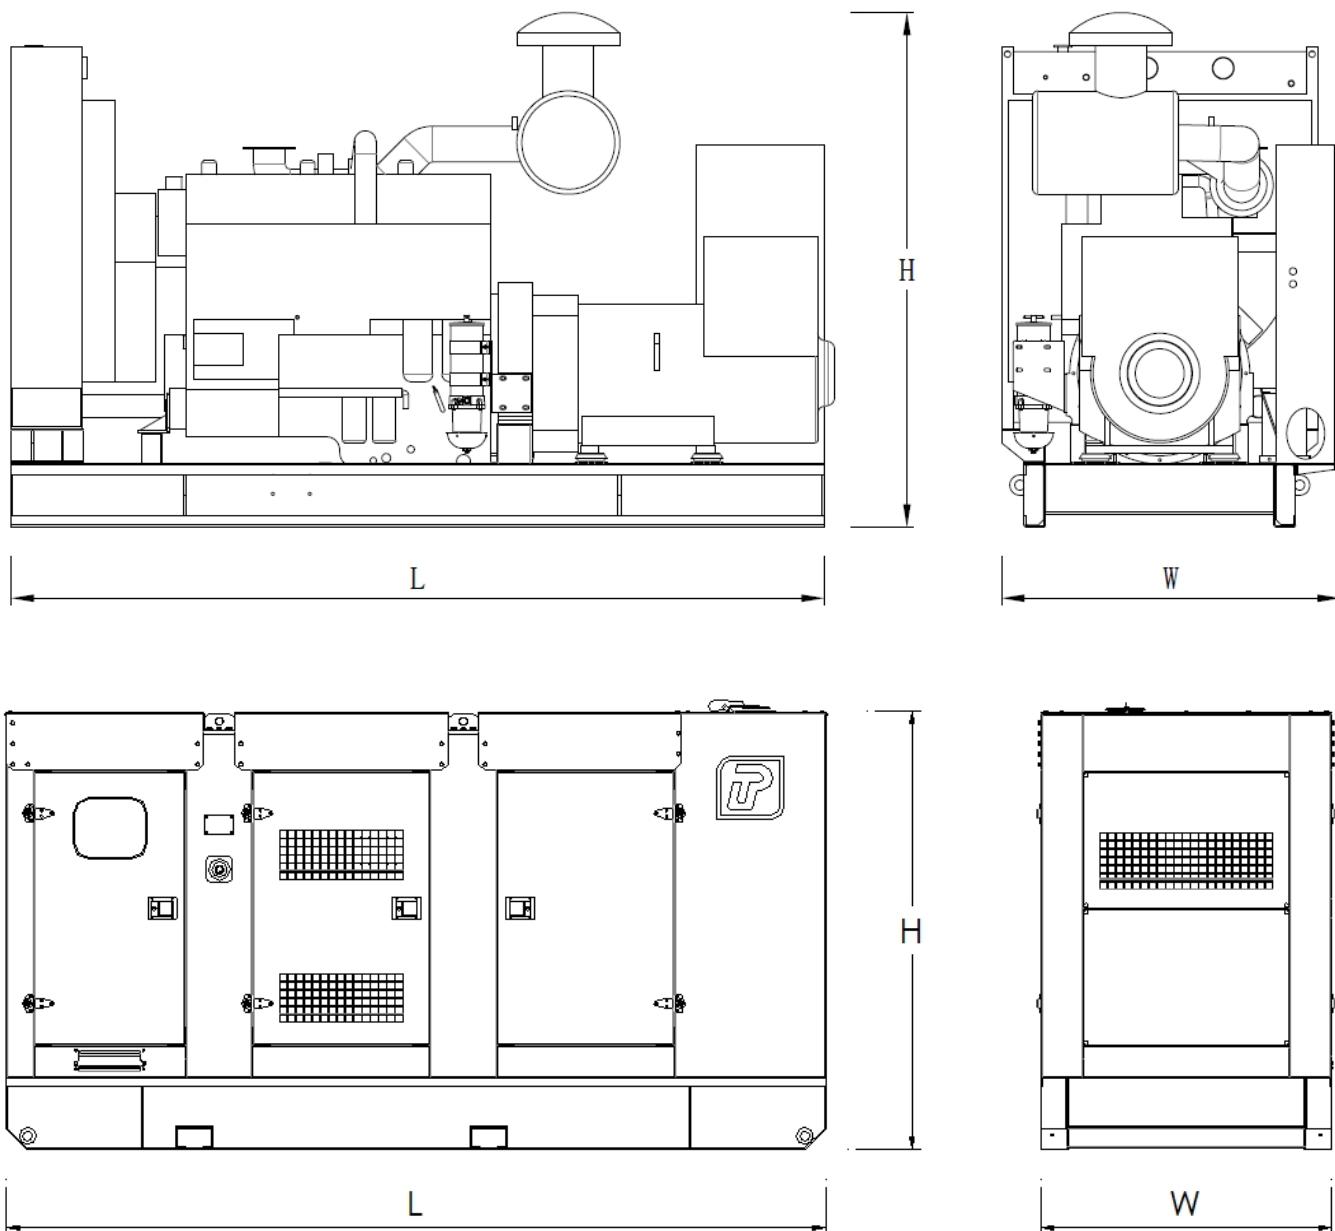

| Type | Dimension (mm) (L*W*H) | Weight (kg) | Fuel Tank Capacity (L) |
|-------------|---------------------------|----------------|---------------------------|
| Open Type | 2950*1067*1528 | 2100 | / |
| Silent Type | 3950*1400*2115 | 3500 | 750 |

Contact Us

Powertec Generator System Inc.

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China
Tel: +86 752-3911119 / 3911118
Fax: +86 752-3911110
Web: www.powertec.com.cn
Email: powertec@powertec.com.cn